

## GV-POE0801 8-Port 802.3at Web Management PoE Switch




- 8-port 10/100BaseTX, PSE plus 2-port Gigabit Uplink (1\*TP, 1\*SFP)
- IEEE 802.3at Compliant (8 Ports at Full 15.4 W)
- Web-based Configuration and Management
- VLAN, QoS, RSTP, IGMP Snooping, LACP, Port Security, Bandwidth Control, Broadcast Storm Control
- Max. 130 W power consumption
- 11" Metal Case
- Up to 8 GV-IP Cameras support

### Introduction

The GV-POE0801 is a 8-port 10/100BaseTX, PSE plus 2-port Gigabit Uplink (1xTP, 1xSFP) Desktop Web Smart PoE Switch. The switch supports IEEE 802.3at Power over Ethernet standard, up to 30 W per port and maximum 130 W power consumption per system, and no special network cable is required for connecting your powered devices (PD), such as IP cameras. The switch also provides exceptionally smart Web management features, such as VLAN, QoS, RSTP, IGMP Snooping, LACP, Port Security, etc. The switch is designed for small or medium network environment to strengthen its network connection and efficiency. It also gives you the option of installing it in a 19" cabinet with a rack mount kit or underneath a desk.

### Dimensions

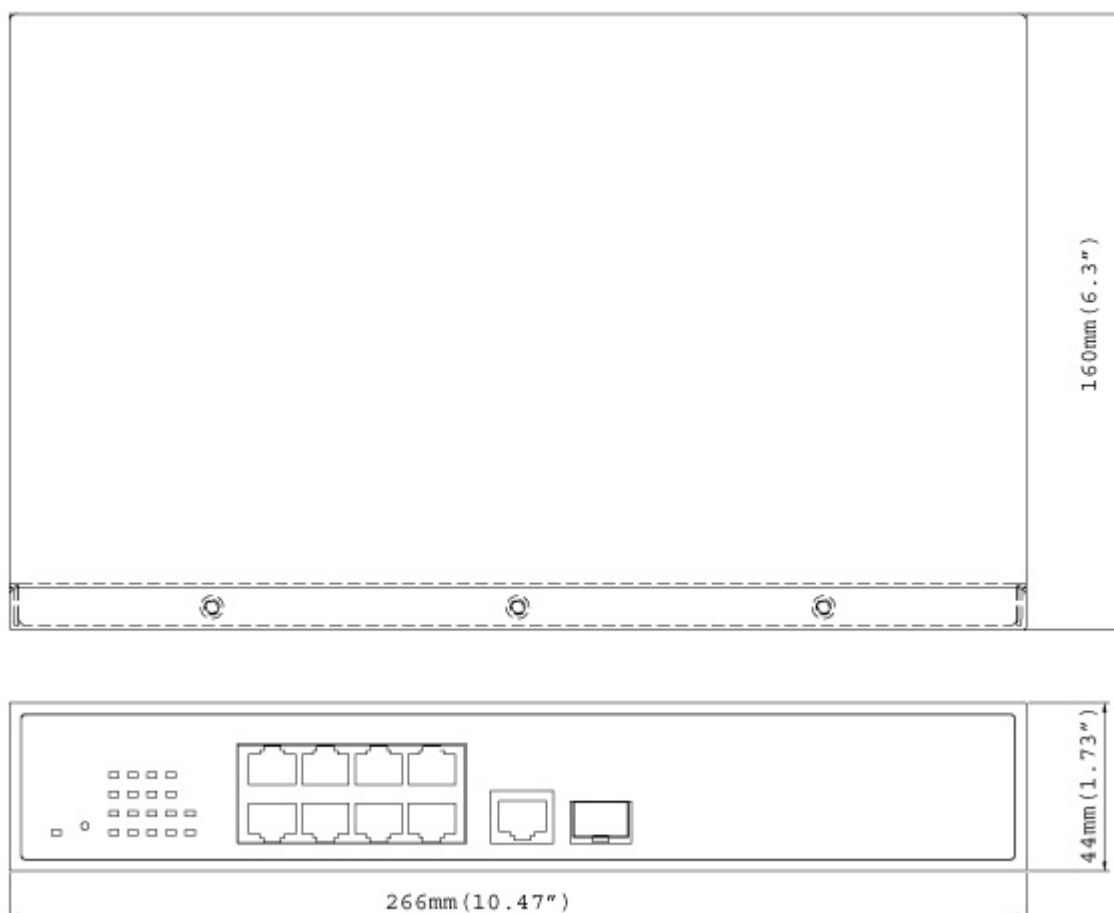

## Specifications

Ethernet		
Layer Supported		L2
Ports		
Number of Ports		10 ports 8-port Fast Ethernet 10/100BaseTX, IEEE 802.3at PSE 2-port Gigabit Uplink (1xTP, 1xSFP)
Performance		
MAC Address		4 K
Buffer Memory		2.75 M bits
Transmission Method		Store and Forward
Transmission Media		10BaseT Cat. 5 UTP/STP 100BaseTX Cat. 5 UTP/STP 1000BaseT Cat. 5e, 6 UTP/STP
Filtering/Forwarding Rates		10 Mbps port - 14,880 pps 100 Mbps port - 148,800 pps 1000 Mbps port - 1,488,000 pps
Backplane Capacity		5.6 Gbps
Smart Features		
Port Based VLAN		10
Tagged Based VLAN		32, VID = 1~4094
IGMP Snooping		V1 & V2
Link Aggregation		1, Gigabit ports
Quality of Service (QoS)		High & Low priority queues, 802.1p
Security		Port & MAC binding, 3 MAC per port
Port Management		Port State, Speed/Duplex, Flow Control Configuration, Port Mirroring, Bandwidth Control, Broadcast Storm Control, PoE
Administrator Management		Web Management, Password Protection, Configuration Backup/Restore, Firmware Upgrade
Mechanical Characteristics		
LED Indicators		Per Port: Link/Act PoE Act/Status Power
Electrical Characteristics		
PoE Power	Input	100 ~ 240 V/AC, 50 ~ 60 Hz
	Output	IEEE 802.3at Compliant Voltage, Per Port Max. 30 watts (8 Ports at Full 15.4 W / 4 Ports at Full 30 W)
Max. Power Consumption		130 W
General		
Dimensions (H x W x D)		44 x 266 x 160 mm (1.73" x 10.47" x 6.3")
Weight		1.8 kg (3.97 lb)
Operating Temperature		0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature		-20°C ~ 90°C (-4°F ~ 194°F)
Humidity		10 to 90% RH (non-condensing)

## Standards and Regulatory

Standards	IEEE 802.3 10BaseT
	IEEE 802.3u 100BaseTX
	IEEE 802.ab 1000BaseT
	IEEE 802.3z 1000BaseSX/LX
	IEEE 802.3x Flow Control
	IEEE 802.3ad Link Aggregation Control Protocol
	IEEE 802.1Q VLAN
	IEEE 802.1p Class of Service
	IEEE 802.1D Spanning Tree Protocol
	IEEE 802.1w Rapid Spanning Tree Protocol
	IEEE 802.3at Power Over Ethernet (PoE+)
Regulatory	CE, FCC Class A



### Note:

1. The switch is a plug-and-play device and compatible with all SFP modules.
2. Specifications are subject to change without notice.

## Front View



## Accessories

Name	Details
GV-LC	 <p>The SFP transceiver complies with IEEE 802.3z 1000BaseSX Ethernet, and provides the media transmission distance up to 220 / 550 m.</p>
GV-LC10	 <p>The SFP transceiver complies with IEEE 802.3z 1000BaseLX Ethernet, and provides the media transmission distance up to 10 km.</p>

## Packing List

1. GV-POE0801 x 1
2. Screw x 8
3. Rack Mount Kit x 1
4. AC Power Cord x 1
5. Software CD x 1
6. GV-POE0801 Quick Start Guide x 1